



Separate LCD panel from the head unit board.

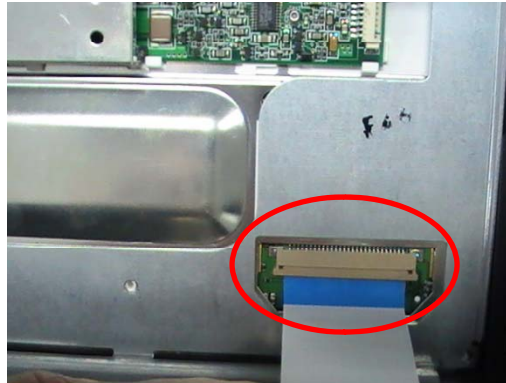


Connect the offered (interface part) flat cable to the connector behind LCD panel.

LCD In

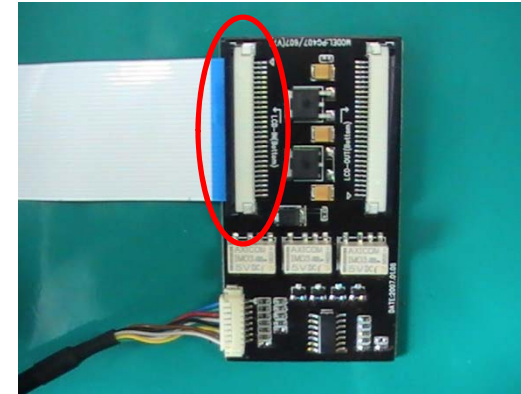

Connect the offered (interface part) flat cable and ground cable to the sub board like above picture.

LCD Out

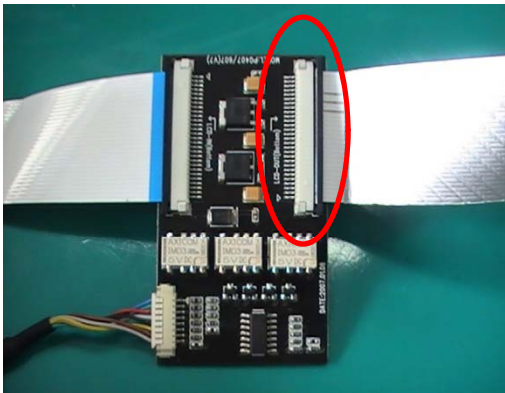

Connect the original flat cable to sub-board like above picture.